


Flavor Burst™

ADPT STL-80 Stoelting® Adapter Kit


Assembly and Installation

The ADPT STL-80 is designed for use with most Stoelting® Freezers. Be sure to contact your local Flavor Burst® distributor if you have special needs for adapting to your specific Stoelting® model.

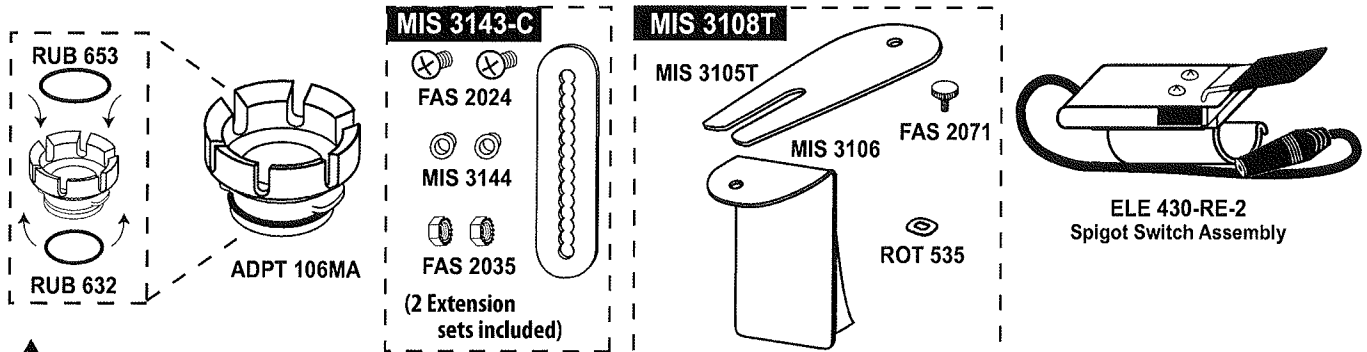


NOTE: THE ELE 430-RE-2 ASSEMBLY FITS FREEZERS WITH A 1/2" ROUND DRAW-HANDLE. FREEZERS WITH A 1/2" FLAT DRAW-HANDLE REQUIRE THE ELE 430-RE-1 SPIGOT SWITCH ASSEMBLY.


1 Install and lube the RUB 653 O-Ring on the freezer door spout. Then, install the RUB 632 O-Ring on the Adapter and snap the Adapter onto the freezer spout to complete the Adapter installation.

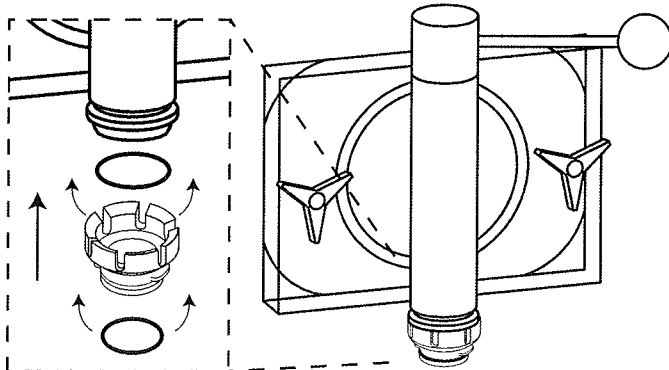


2 Rotate the Switch Assembly onto the draw-handle bar.

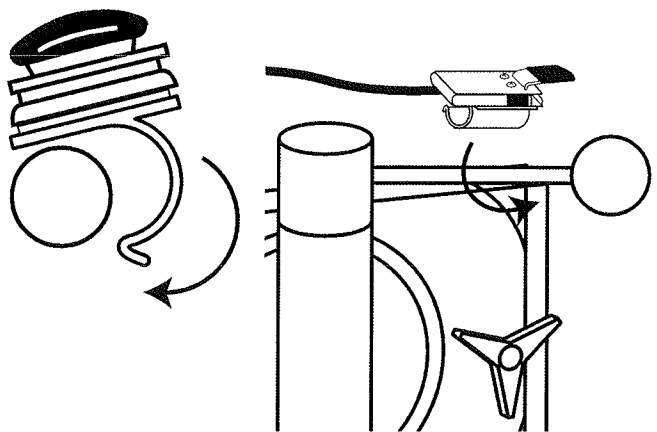

3 Position the Switch up towards the end of the draw-handle bar to complete switch installation.

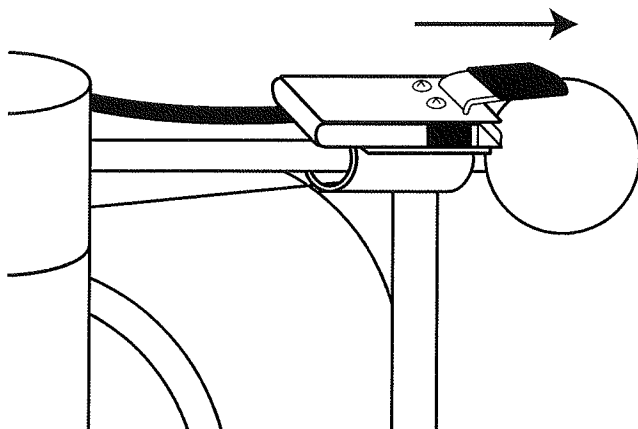


4 Be sure to fully engage the Spigot Switch jack to the Flavor Burst™ keypad jack for normal operation. Do not neglect to check this connection during daily startup.

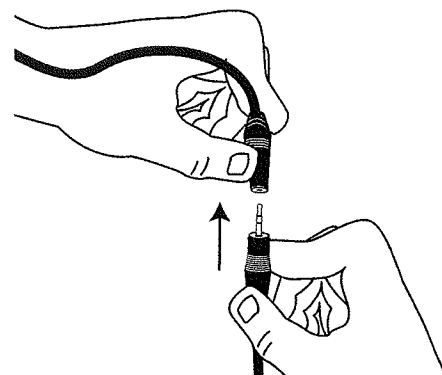

A MIS 3143C SUSPENSION BRACKET EXTENSION


This kit comes with two options for an Injector Mounting Bracket due to freezer model variations. When possible, use the suspension bracket included with your unit and the extensions provided. If the suspension bracket is not suitable for your freezer, install the MIS 3108T mounting bracket in section B.

- 5** If your Injector Assembly has a Suspension Bracket, reassemble the bracket using the extension bracket and fasteners as shown.

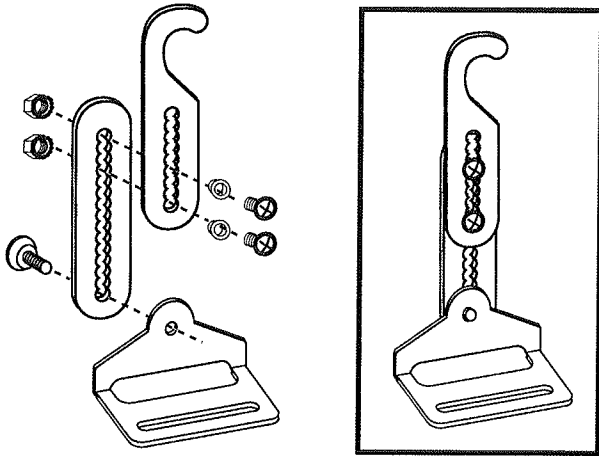


NOTE: IF MORE HEIGHT IS NEEDED, USE BOTH OF THE EXTENSION BRACKET KITS WITH THE SUSPENSION BRACKET.


- 6** Attach the Injector Assembly to the spout adapter so that the Injector locking ring covers the adapter tabs. Turn the locking ring 1/4 of a turn to secure.

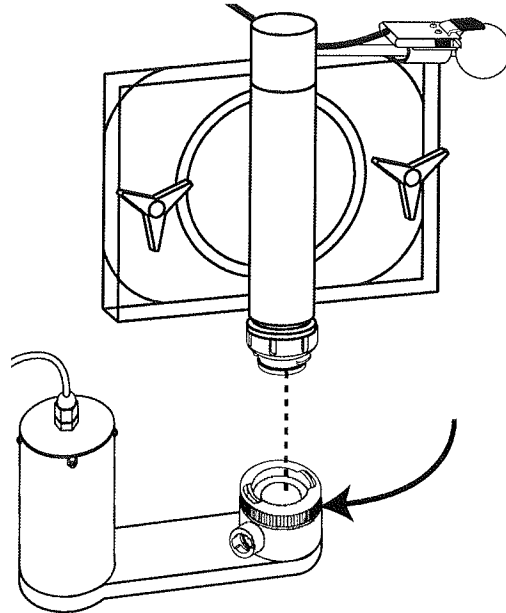

- 7** Hang the Suspension Bracket Assembly on the hand knob of the freezer nearest the Injector Assembly. Position the Bracket so that the bottom plate is underneath the Injector Assembly and the threaded post slides through the bracket plate slot.

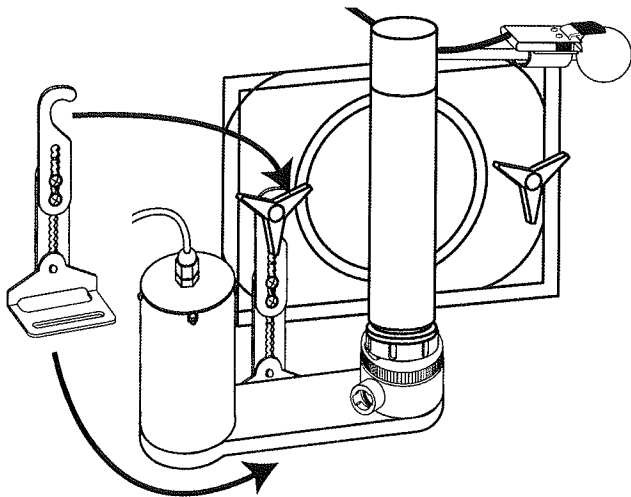


- 8** Using the adjustment screws, lengthen or shorten the bracket so that it supports the Injector Assembly in a level position. Also, install the Gear Box thumb nut onto the threaded post of the Gear Box. Tighten the screws and knob to complete the installation.

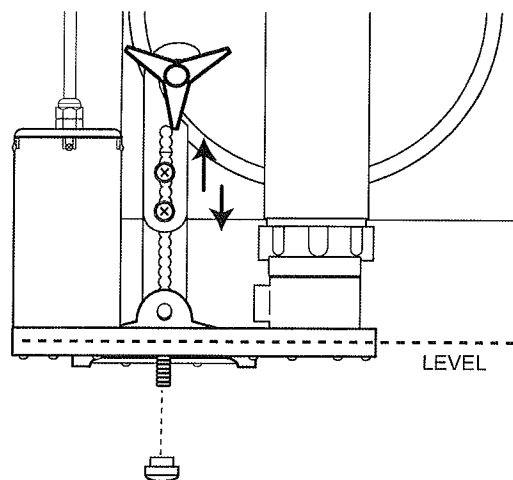


B MIS 3108T MOUNTING BRACKET


- 9** Assemble the Mounting Bracket. Ensure the washer is between the upper plate and the base plate.

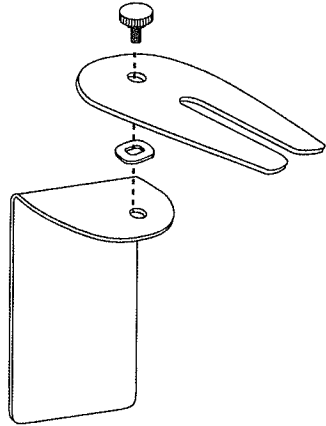


- 10** Attach the assembled MIS 3108T Mounting Bracket to the Injector System and then connect the Injector Head to the Injector Adapter.

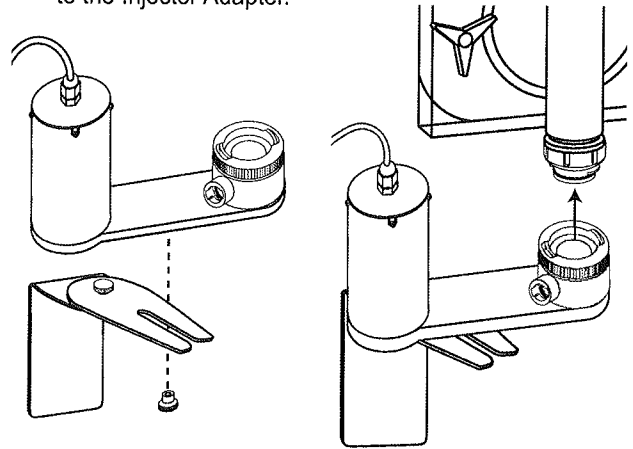

- 11** Position the Injector Assembly and Mounting Bracket so that they are horizontally level.

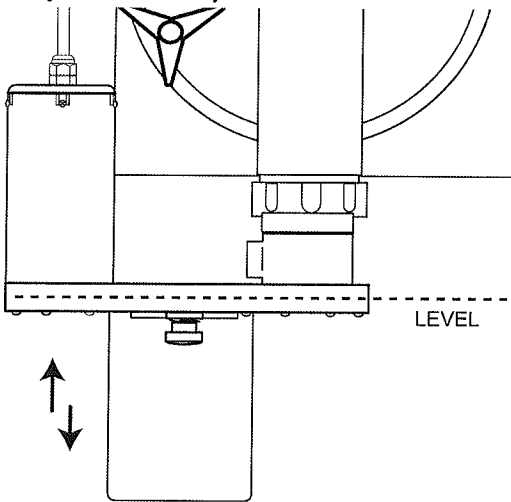


- 12** Move the bracket into position on the face of the freezer and ensure the Injector Assembly is level. On the freezer panel, mark around the bottom and sides of the bracket using a pencil.

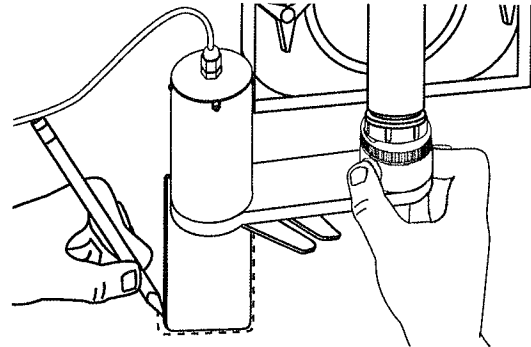

NOTE: BE SURE THE SURFACE OF THE FREEZER WHERE THE BRACKET BASE WILL BE ATTACHED IS THOROUGHLY CLEAN AND DRY.

- 13** Disconnect the Injector Assembly from the Adapter. Remove the protective backing from the adhesive strip on the bracket base. Press firmly against the freezer.

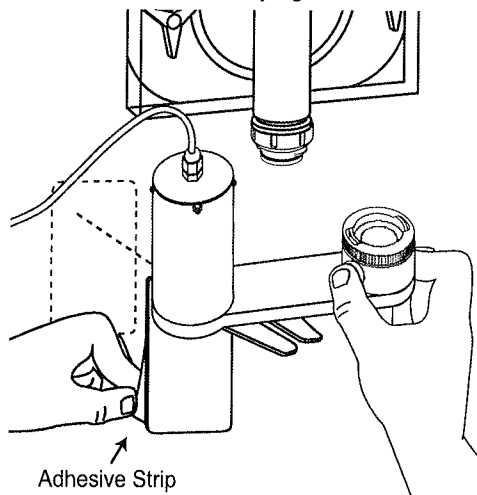

- 14** Reattach the Injector Head to the Adapter to complete the assembly and installation of the Mounting Bracket.

