




Flavor Burst™


ELE 447-EF Draw-Handle Switch Assembly Installation for freezers with 1/2" draw-handle rod

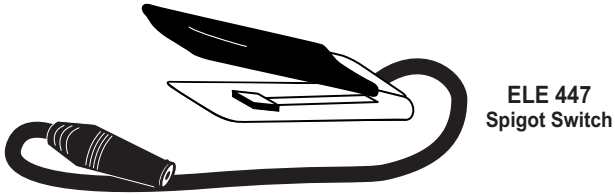


- 1** Remove the protective backing from the FAS 2003 Retaining Clip.




- 2** Attach the Retaining Clip to the underside of the ELE 447 Spigot Switch.

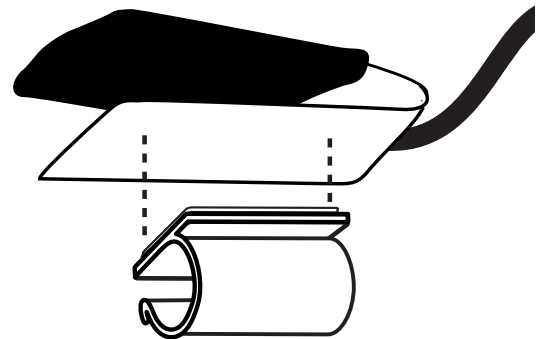

- 3** Rotate the Switch onto the draw-handle rod to complete the basic assembly.

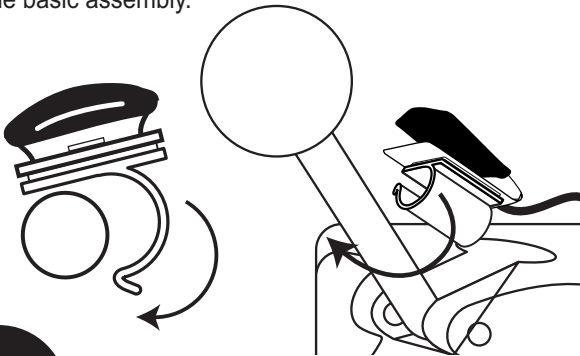


NOTE: BE SURE TO FULLY ENGAGE THE SPIGOT SWITCH JACK TO THE FLAVOR BURST™ KEYPAD JACK FOR NORMAL OPERATION. DO NOT NEGLECT TO CHECK THIS CONNECTION DURING DAILY STARTUP.

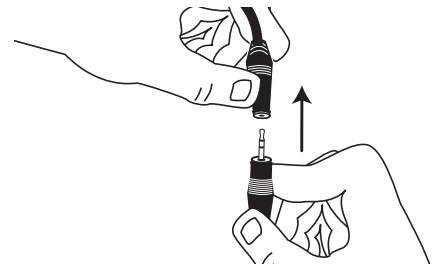

OPT

OPTIONAL: You may install Hook & Loop Tape between the draw-handle rod and the Retainer Clip to prevent the switch assembly from rotating during normal operation.

- 4** Remove the protective backing from the Hook & Loop Tape. Attach one side to the draw-handle rod and the other side to the Retainer Clip.

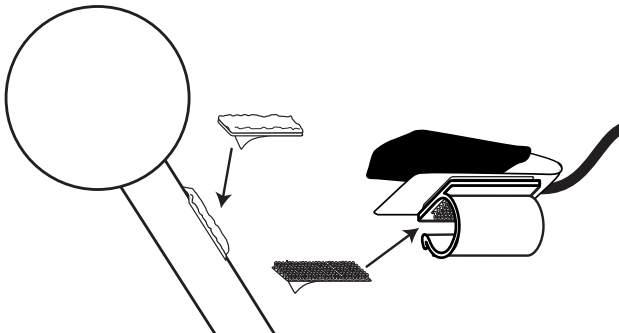

- 5** Be sure to align both sides of the Hook & Loop Tape as you rotate the Retainer Clip onto the draw-handle rod to complete the assembly.

