


# Flavor Burst™


## ELE 520 Internal Switch Coupler Kit - Standard Beater Setup and Installation

The ELE 520 is designed for use with the Taylor® 430 model and uses the existing internal Taylor® switch to activate the Flavor Burst™ unit. (For applications that require constant beater motion refer to Item # ELE 517.) Two recommended locations for installing the stereo panel jack are noted below, although other locations may be acceptable according to your application -- be sure to consider the desired keypad location, additional freezer-mounted POP, and kiosk applications as you prepare for installation.

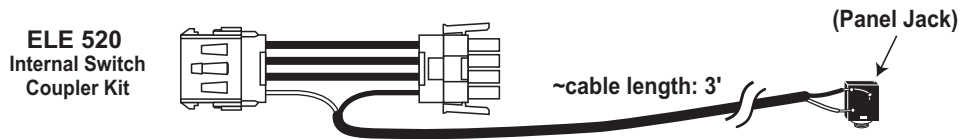


**! WARNING: DO NOT ATTEMPT INSTALLATION UNTIL THE MAIN POWER SUPPLY TO THE FREEZER HAS BEEN DISCONNECTED.**



**1** Remove the service side panel from the 430 freezer and identify the 4-wire connector.

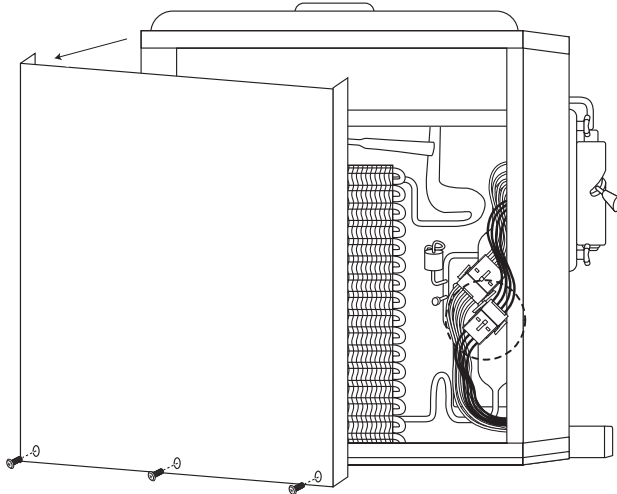

**2** Disconnect the line connector and add the ELE 520 switch coupler assembly to the line as shown.

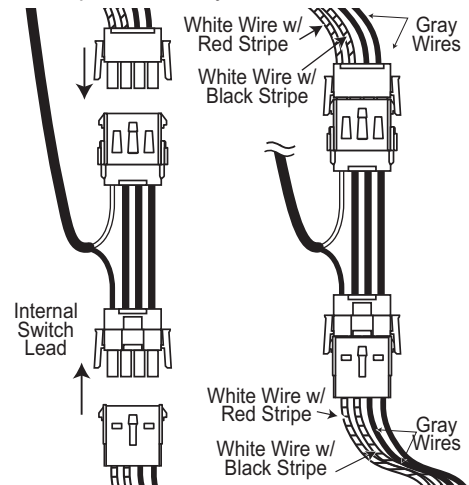


**3** Drill a 1/4" hole in the freezer panel in location **A** or **B**. Mount the panel jack through the hole from inside the freezer. Thread the ring to the panel jack from outside the freezer to secure.

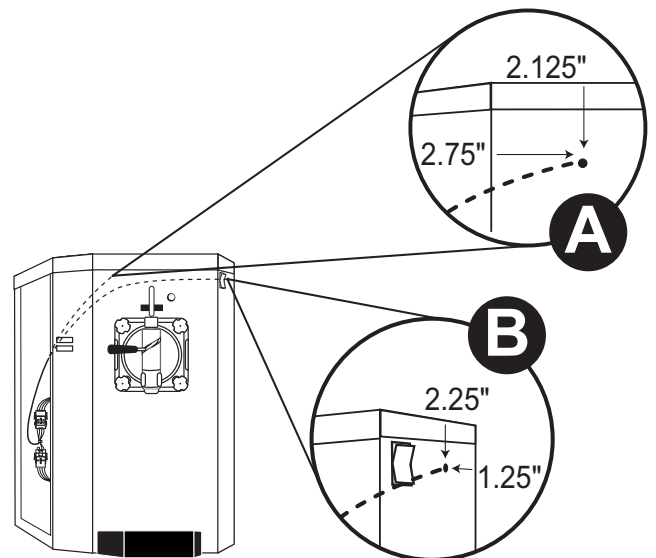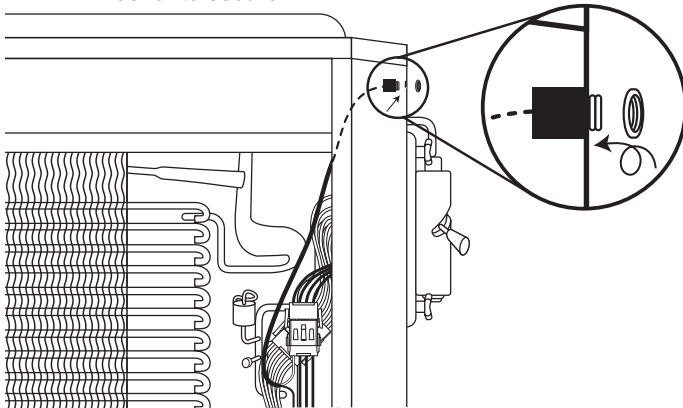


**! DISCLAIMER: UL DOES NOT RECOGNIZE THIS APPLICATION AS AN APPROVED PROCEDURE DUE TO THE DRILLING REQUIRED. WHEN THIS PROCEDURE IS USED ON A UL LISTED FREEZER, THE INSTALLER WILL BE PERFORMING INSTALLATION PROCEDURES BEYOND THE PARAMETERS UNDER WHICH THE UNIT WAS APPROVED.**

- 4** Replace the service side panel on the freezer to complete the assembly.

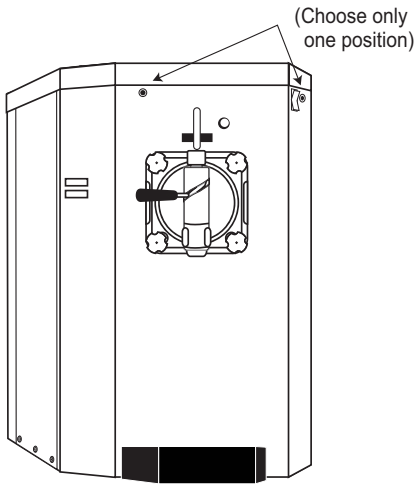

**NOTE:** FREEZER MUST BE SWITCHED TO 'AUTO' OR 'WASH' FOR THE ELE 520 TO FUNCTION.

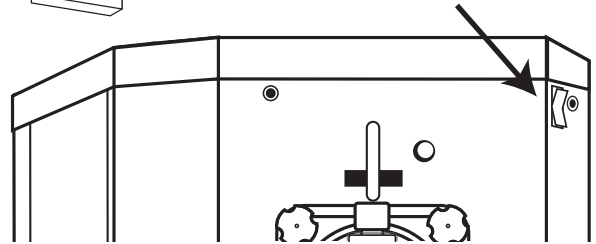

**NOTE:** IF THE INTERNAL SWITCH DOES NOT WORK PROPERLY AND EACH STEP OF THE INSTALLATION HAS BEEN COMPLETED AS INSTRUCTED, THEN IT MAY BE NECESSARY TO SWITCH THE #5 AND #6 WIRES OF THE ELECTRONICS BOARD AT THE BACK OF THE FREEZER.