

# Flavor Burst®

## MIS 3302K C300 Conversion Bracket Kit

### Installation


The MIS 3302K is a special bracket kit for mounting the Jumbo Touch Panel on a Taylor C300 freezer. The 2-barrel freezer is not wide enough to support all three hinges of the Jumbo Touch Panel without the bracket. The bracket helps secure the entire width of the Jumbo Touch Panel across the more narrow C300 freezer. The Jumbo Touch Panel will extend past the freezer on both sides. This kit is not included with the JBT 80FCB-3B system and should be ordered separately for installation on a C300 freezer. For more information, please contact your local Flavor Burst® distributor.




**NOTE:** DUE TO SLIGHT MANUFACTURING DIFFERENCES, SOME DRILLING MAY BE NECESSARY IF THE SCREW HOLES DO NOT LINE UP WITH THE HINGES.




**NOTE:** AT LEAST 2 PEOPLE ARE REQUIRED FOR THE INSTALLATION OF THE JUMBO TOUCH PANEL SCREEN.

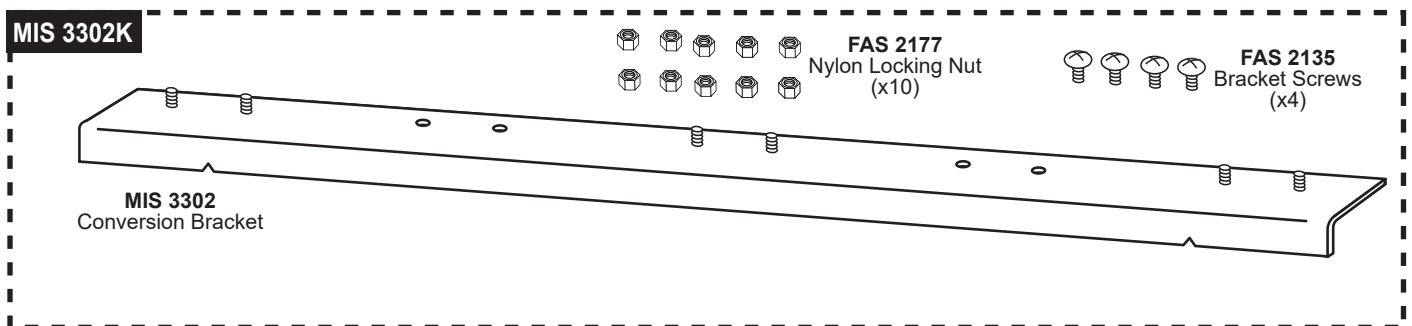


- 1 With one person holding the light box display and another person operating a screwdriver, loosen and remove the screws from the manufacturer's light box display hinges. Remove the manufacturer's light box display from the freezer.

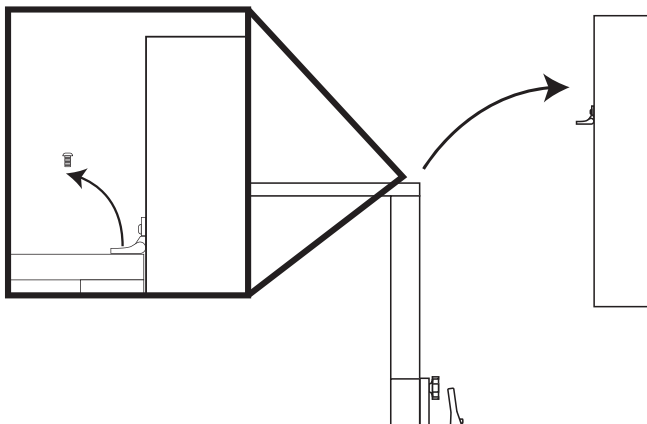

- 2 Line the bracket up flush with the top edge of the freezer and the lip of the bracket over the edge. Center it between the two notches on the bracket. Mark the freezer through the bracket screw holes.

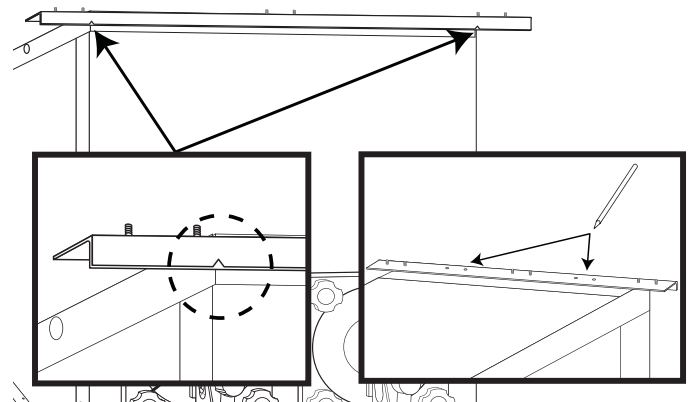


- 3** Use a 7/32" or 13/64" drill bit to drill four holes into the freezer for the new screws.

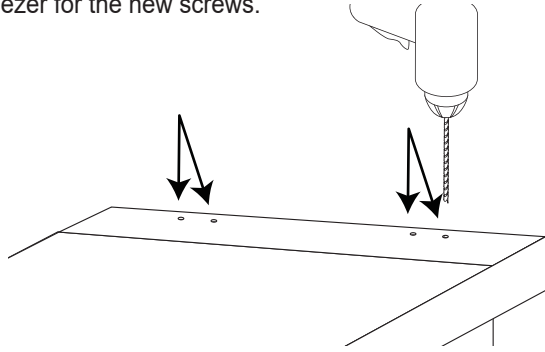


**NOTE:** DO NOT MAKE A HOLE LARGER THAN 0.23" DIAMETER.


- 4** Remove the top panel of the freezer. Use the 4 screws to attach the bracket to the freezer and the nylon locking nuts to secure them from under the freezer panel.

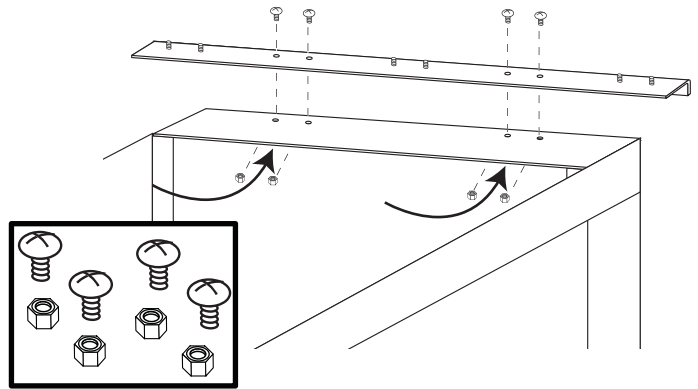


- 5** Hang the Jumbo Touch Panel hinges on the bracket posts. Secure the Jumbo Touch Panel with the nylon locking nuts provided.

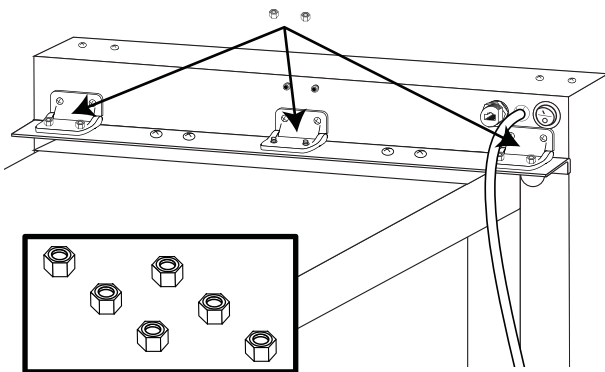

- 6** Lift the Jumbo Touch Panel to test the hinges and stability of the mounting. Make adjustments as needed.

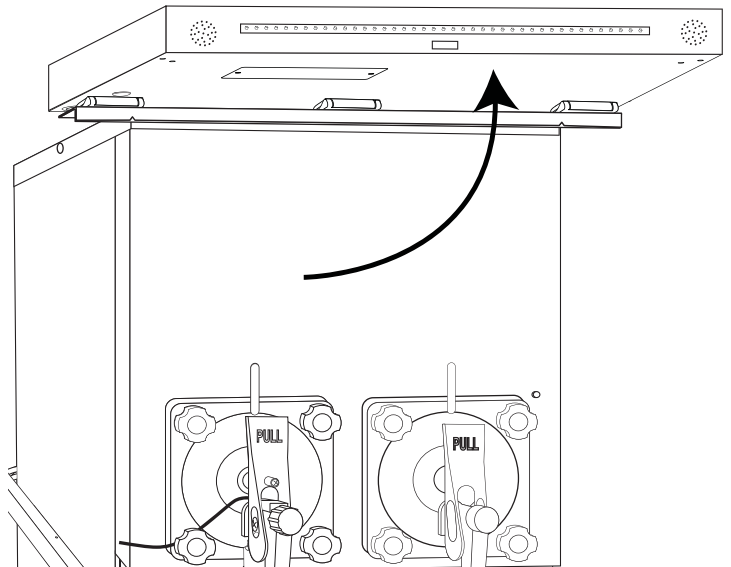

- 7** Plug the ethernet cable into the ethernet gland next to the power cable. Plug the spout switch into one of the ports at the top center of the Jumbo Touch Panel. It doesn't matter which port; the Jumbo Touch Panel programming will link to the active switch during the setup procedure.

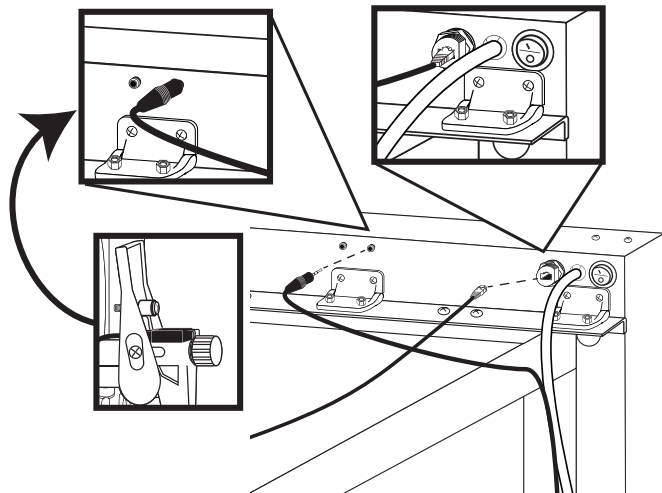

- 8** Refer to your JBT 80FCB-3B Operations Manual and the Jumbo Touch Panel Operations Manual to finish the installation and setup of your system.

